

SF-5202
03/2018

RIDING AREA
SPRINKLERS XLR24 (6)

60 x 30 m

Water supply : 14 m³/h 5 bar

LIST OF MATERIAL

	<u>Description</u>	<u>Quantity *</u>
XLR24	2" Rain Bird XLR24 water jet + 3" riser and concrete base	6 u
Falcon PC-SS	-	u
Falcon FC-SS	-	u
950E	-	u
B99500	-	u
103043-32	-	u
B81600-14	-	u
SJ-12-100-22	-	u
SJ-12-150-23	-	u
150-PGA	-	u
200-PGA	2" (50x60) electric valve globe/angle w/ manual isol. valve	6 u
300-BPES	-	u
VB-JMB-H	Rectangular valve box: L. 70.1, W. 53.3, H. 30.7 cm	6 u
VB-JMB-6EXT	Extension for Jumbo valve box, 17.1 cm	6 u
DBRY20	30V Waterproof wire connectors	12 u
IESP4MEEUR	ESP-Me 4-station controller	1 u
ESP-SM3	3-station extension module	1 u
LNKWIFI	LNK WIFI Module Int	1 u
ESP-LX-M-SM8	-	u
RSD-BEx	-	u
Ø40	-	m
Ø50	-	m
Ø63	Ø63 HDPE pipes (10 bar) including fittings	190 m
Ø75	Ø75 HDPE pipes (10 bar) including fittings	50 m
Ø90	-	m
Ø110	-	m
DI 115	1x1.5 mm ² electric cable, double insulation	780 m
	Water supply : 14 m ³ /h 5 bar	1 u


	90°	180°
Valve number:	A1, 3, 4, 6	A2, 5
Precipitation rate in mm/h	57.8	28.8
Irrigation run time per valve for an amount of 5 mm	5	10

* ---- For a water supply and a controller located at 50 m from the field ----

SF-5202

RIDING AREA
SPRINKLERS XLR24 (6)

60 x 30 m

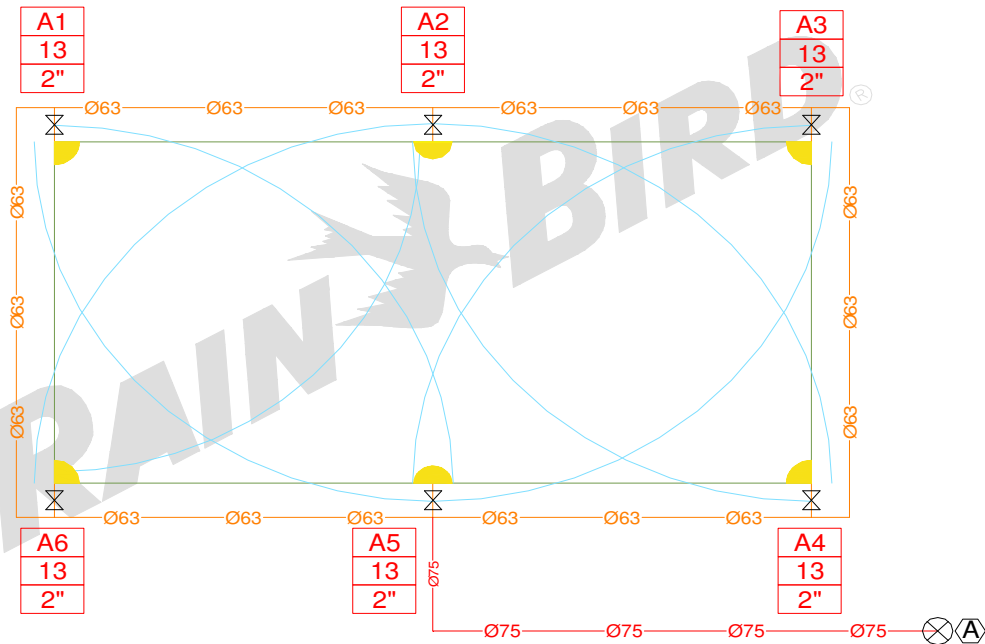

Legend and technical data

- Controller and point of connexion with isolation valve
- Electric valve

Sprinkler:	XLR24
Nozzle:	#14
Pressure in bar:	3.0
Radius in m:	31.6
Flow in m ³ /h:	13.00

Controller Station/Flow/Size of the valve

A3
20.5
2"

Note :

HIGH DENSITY POLYETHYLENE PIPES: PN10 - ADDITIONAL LATERALS OUTSIDE PLAY FIELD AREA MAY BE INSTALLED PROVIDED HYDRAULIC CAPABILITY OF SUPPLY IS NOT EXCEEDED - SPRINKLER LOCATIONS ARE TO SCALE. PIPE LOCATIONS ARE DIAGRAMMATIC.

Rain Bird presents this plan as a typical sports field layout. Rain Bird offers no indemnity, expressed or implied, for projects installed from this plan. Since each site and system contains many variables, Rain Bird expressly recommends the use of a qualified irrigation designer.